




workforce management
made easy

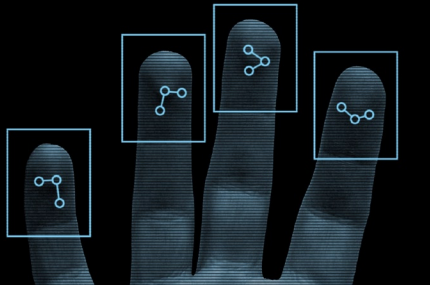

ITR-715

A simple, affordable data collection terminal.

- Fast and simple collection of employee punches
- Easy to read symbol IN, OUT and Break keys
- Programmable Job and Department keys
- Operates independently or as part of your network

ITR supports its customers through a network of regional offices and a central Customer Care Center.



ITR-715

The ITR-715 terminal is designed as a cost effective data collection solution. The terminal is ideal for obtaining fast and precise employee punch information, and can also be programmed for one level tracking of job data or department transfer information.

The ITR-715 has been tested for optimal reliability. A high MTBF ensures virtually uninterrupted performance. The sealed keypad and the unique ergonomical design reduce maintenance costs.

ITR-715

ITR's functionality and feature-rich data collectors deliver measurable results and quick return on investment, typically in six months or sooner, with substantial ongoing annual savings.

General Features

- Operates both off-line and on-line with a host computer
- Master badge for easy set-up and diagnostics
- Perpetual real-time clock
- Automatically changes for daylight savings time
- Audible tones for badge acceptance / rejection

Interfacing

- RS-232 and RS-485 communications for multidrop of up to 31 terminals on a single communication port
- Variable communication rate (1200 to 19,200 bps)
- Maximum distance from host - 3km (RS-485)

Physical Characteristics

Dimensions:

Height: 17.5 cm
Width: 11.1 cm
Depth: 6.3 cm
Weight: 765 grams

Technical Specifications

Memory:

- Battery protected 128kb RAM for storing over 10,000 transactions
- Rechargeable back-up battery enables over 10 hours of full operation during power failure
- Warning indicator for memory status

Display:

- High quality, illuminated LCD display with 2 lines of 16 characters
- Can be programmed to show time, date, function, status, different totals and personal messages, as desired.
- Alarm LED for irregularities notification

Keypad:

- 12 dual / numeric function keys, six of which are programmable
- Function keys are provided with LED indicators

Readers:

- Barcode (3-of-9)
- Magnetic (track 1, track 2)

Optional Accessories:

- Add on internal modem (14,400 bps)
- Add on internal 12 V DC dry-contact relay
- Internal Ethernet card for TCP/IP communication (if TCP/IP is used, relay is not available)

Power Requirements:

- Voltage: 230 / 115 V AC = 10%, 50 /60 Hz
- Current consumption: less than 5 watts

Environmental Characteristics:

- Temperature: 0° to +50°C
- Humidity: up to 95% RH



International Time Recorder Company Limited

7A Taymall Avenue
Toronto, Ontario M8Z 3Y8
Canada

Tel: 416-252-1186
Fax: 416-255-1565
Toll Free: 1-877-567-0633
info@itr.ca